LED3*CEILING FLAT 2IN1

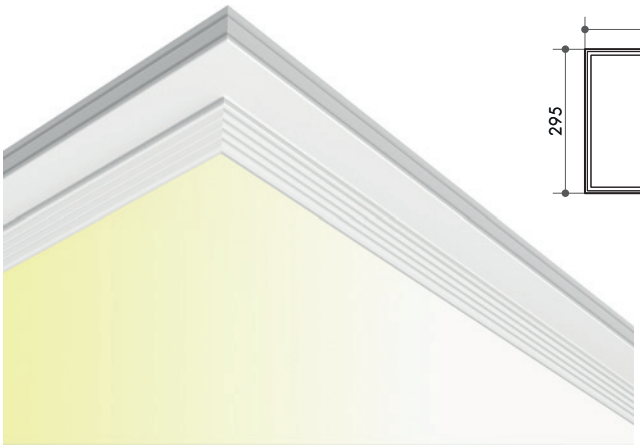

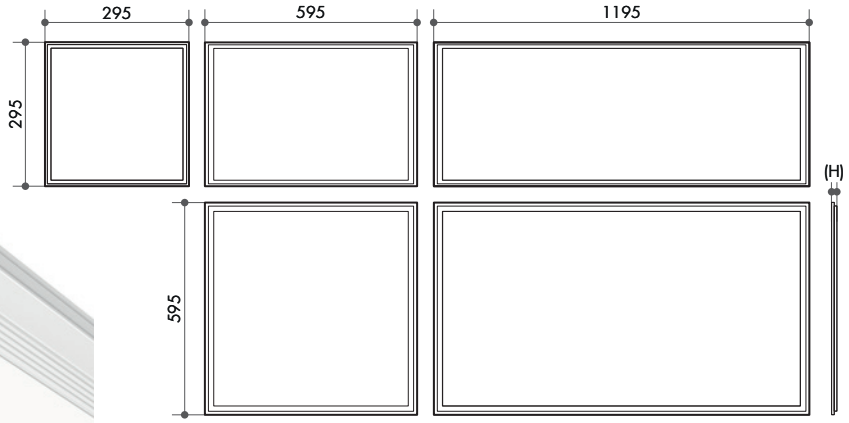

RÉFÉRENCES *REFERENCES*	COULEUR *COLOR*	FLUX EN BLANC *WHITE ONLY LUMENS*	DIMENSIONS *DIMENSIONS*	PUISSANCE *CONSUMPTION*	ALIMENTATION *POWER*
LCF3X3.18-2IN1		1530 lm	(L)295 x (l)295 x (H)11mm	18 W	
LCF6X3.24-2IN1		2040 lm	(L)595 x (l)295 x (H)11mm	24 W	
LCF6X6.40-2IN1	☐ 2700 K + ☐ 6000 K	3400 lm	(L)595 x (l)595 x (H)11mm	40 W	24 VDC
LCF12X3.40-2IN1		3400 lm	(L)1195 x (l)295 x (H)11mm	40 W	
LCF12X6.60-2IN1		5100 lm	(L)1195 x (l)595 x (H)11mm	60 W	

- LED Epistar - IRC 85
  LED Epistar - IRC 85
- 50 000 heures - L80 B10 à Ta = 25°C
  50 000 hours - L80 B10 at Ta = 25°C
- Polycarbonate avec dissipateur aluminium
  Polycarbonate with aluminium dissipator
- 20cm de câble avec connecteur femelle inclus
  20cm cable with female connector included
- Convertisseur déporté inclus 100-245 VAC
  Remote driver included 100-245 VAC
- -20°C / +50°C
  -20°C / +50°C
- UGR < 19
  UGR < 19

FINITIONS *FINISH*

☐ Blanc *White* ☐ Gris *Grey*

OPTIONS *OPTIONS*

Gestion DALI, DMX, 0-10V, KNX, Radiofréquence, ZigBee, Casambi
DALI, DMX, 0-10V, KNX, Radio Frequency, ZigBee, Casambi

LCF-CORD : Filins de suspension
LCF-CORD : Y shape chains

LCF....-FRAME : Cadre de fixation en saillie
LCF....-FRAME: Surface fixation frame

IP65
IP65