




## LED3\*DOWNLIGHT FLAT UGR

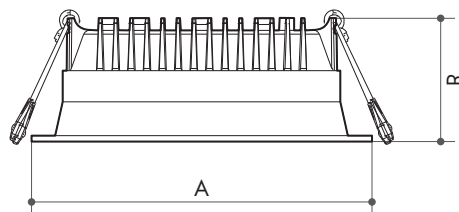

RÉFÉRENCES REFERENCES	CC	COULEUR COLOR	OPTIQUE BEAM ANGLE	FLUX (4000K) LUMENS (4000K)	PUISSANCE POWER	TAILLE (AXB) SIZE (AXB)	PERÇAGE CUT-OUT
LDLF.3-CC-OP	30K = <span style="display:inline-block; width:10px; height:10px; background-color:#ffff00;"></span> 3000 K 40K = <span style="display:inline-block; width:10px; height:10px; background-color:#ffff00;"></span> 4000 K 60K = <span style="display:inline-block; width:10px; height:10px; background-color:#ffff00;"></span> 6000 K		90°	270 lm	3 W	Ø90 x (H)58mm	Ø75 mm
LDLF.5-CC-OP				450 lm	5 W	Ø90 x (H)58mm	Ø75 mm
LDLF.7-CC-OP				630 lm	7 W	Ø103 x (H)56,5mm	Ø90 mm
LDLF.10-CC-OP				900 lm	10 W	Ø103 x (H)56,5mm	Ø90 mm
LDLF.12-CC-OP				1200 lm	12 W	Ø136 x (H)56,5mm	Ø120 mm
LDLF.15-CC-OP				1500 lm	15 W	Ø136 x (H)56,5mm	Ø120 mm
LDLF.17-CC-OP				1700 lm	17 W	Ø160 x (H)57mm	Ø145 mm
LDLF.20-CC-OP				2000 lm	20 W	Ø160 x (H)57mm	Ø145 mm
LDLF.25-CC-OP				2500 lm	25 W	Ø178 x (H)59,5mm	Ø160 mm
LDLF.30-CC-OP				3000 lm	30W	Ø210 x (H)60mm	Ø200 mm
LDLF.35-CC-OP				3500 lm	35 W	Ø210 x (H)60mm	Ø200 mm

LED Epistar SMD - IRC 85+  
LED Epistar SMD - CRI85+

50 000 heures - L80 B10 à Ta = 25°C  
50 000 hours - L80 B10 at Ta = 25°C

Aluminium peint poudre epoxy texturé  
Aluminium textured painted epoxy powder

Convertisseur déporté inclus  
Converter included

-20°C / +50°C  
-20°C / +50°C

### FINITIONS FINISH



### OPTIONS OPTIONS

IRC 90+ sur demande  
CRI 90+ on request

Gestion DALI, DMX, 0-10V, KNX, Radiofréquence, Triac, Push Dim  
DALI, DMX, 0-10V, KNX, Radio Frequency, Triac, Push Dim control

