





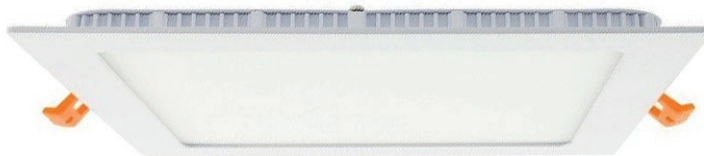


led3


LED3* DOWNLIGHT ULTRA FLAT SQUARE

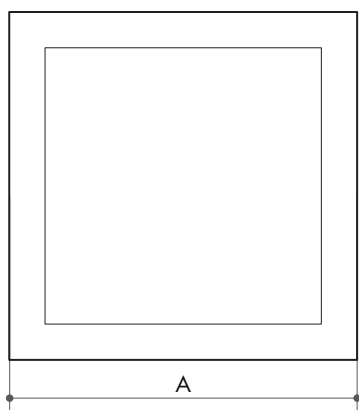



RÉFÉRENCES REFERENCES	CC	COULEUR COLOR	OPTIQUE BEAM ANGLE	FLUX (4000K) LUMENS (4000K)	PUISSANCE CONSUMPTION	TAILLE (AXB) SIZE (AXB)	PERÇAGE CUT-OUT
LDL06UFS-CC-120	27K =  2700 K 30K =  3000 K 40K =  4000 K 55K =  5500 K		 120°	480 lm	6 W	120 x 120 x 20mm	125 x 125 mm
LDL09UFS-CC-120				720 lm	9 W	140 x 140 x 20mm	145 x 145 mm
LDL12UFS-CC-120				960 lm	12 W	160 x 160 x 20mm	175 x 175 mm
LDL15UFS-CC-120				1200 lm	15 W	190 x 190 x 20mm	210 x 210 mm
LDL18UFS-CC-120				1440 lm	18 W	225 x 225 x 20mm	225 x 225 mm
LDL24UFS-CC-120				1920 lm	24 W	240 x 240 x 20mm	240 x 240 mm

 LED Epistar SMD - IRC 85+
LED Epistar SMD - CRI85+

 50 000 heures - L80 B10 à Ta = 25°C
50 000 hours - L80 B10 at Ta = 25°C

 Aluminium peint
Aluminium painted

 Convertisseur deporté inclus
Converter included

 -20°C / +45°C
-20°C / +45°C

FINITIONS FINISH

Blanc
White

OPTIONS OPTIONS

Gestion DALI, DMX, 0-10V, KNX, Radiofréquence, Triac, Push Dim
DALI, DMX, 0-10V, KNX, Radio Frequency, Triac, Push Dim control

LDLUF5-IP54 : Option IP54

LDLUF5-IP54 : IP54 option

