




LED3*DOWNLIGHT V



RÉFÉRENCES REFERENCES	CC	COULEUR COLOR	OPTIQUE BEAM ANGLE	FLUX (4000K) LUMENS (4000K)	PUISSANCE POWER	TAILLE (AXB) SIZE (AXB)	PERÇAGE CUT-OUT
LDL8V-CC-90	27K =  2700 K 30K =  3000 K 40K =  4000 K 55K =  5500 K		 90°	690 lm	8 W	Ø113,5x65,5 mm	Ø90-100 mm
LDL10V-CC-90				870 lm	10 W	Ø113,5x65,5 mm	Ø90-100 mm
LDL14V-CC-90				1250 lm	14 W	Ø142x75 mm	Ø120-130 mm
LDL20V-CC-90				1550 lm	20 W	Ø173x85 mm	Ø145-155 mm
LDL25V-CC-90				2400 lm	25 W	Ø233x91 mm	Ø195-210 mm

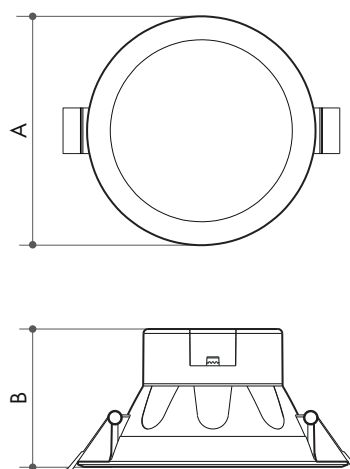

LED SMD HONGLI - IRC > 85
LED SMD HONGLI - IRC > 85



40 000 heures - L80 B10 à Ta = 25°C
40 000 hours - L80 B10 at Ta = 25°C



Aluminium / polymère conducteur
Aluminium / conductive polymer



Convertisseur intégré 230 VAC
Converter integrated 230 VAC



-20°C / +45°C
-20°C / +45°C

FINITIONS FINISH

☐ Blanc
White

OPTIONS OPTIONS

IRC 90+ sur demande
CRI90+ on request

Gestion DALI, DMX, 0-10V, KNX, Radiofréquence, Triac, Push Dim
DALI, DMX, 0-10V, KNX, Radio Frequency, Triac, Push Dim control

