



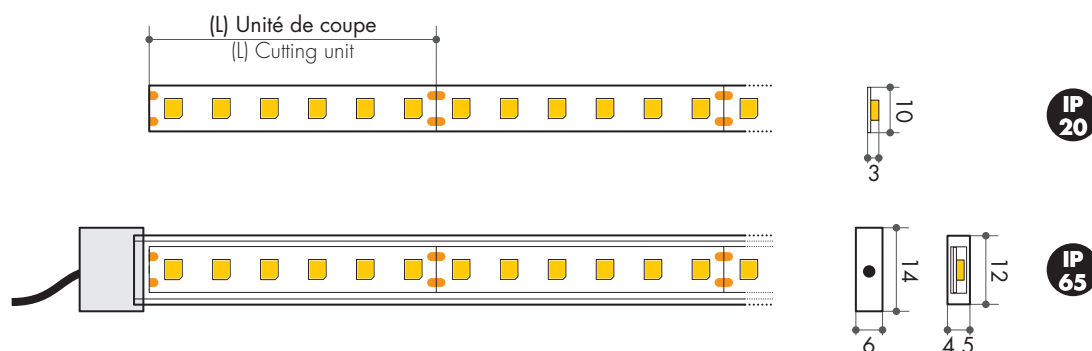

LED3*FLEX 2835 HE 112

HIGH EFFICIENCY

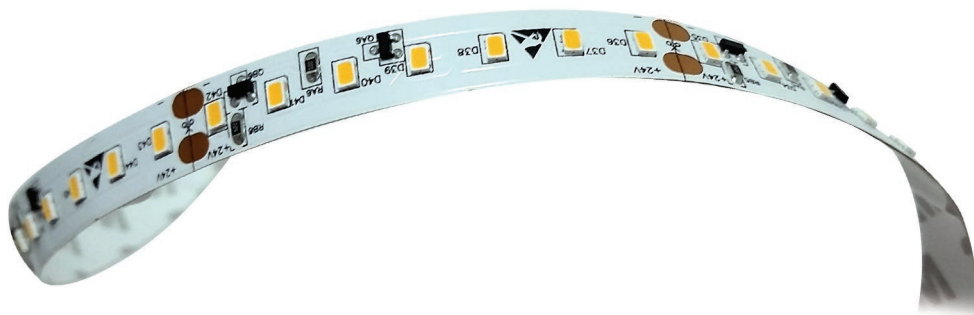

- LED SMD 3528 - IRC 85+ - 3 ellipses de MACADAM - 1 BIN
3528 SMD LED - CRI85+ - 3 SDCM - 1 BIN
- 50 000 heures - L80 B10 à Ta = 25°C
50 000 hours - L80 B10 at Ta = 25°C
- Toutes les 8 LED
Every 8 LED
- Régulation interne en courant constant - Protection thermique
Strip current adjustable as working temperature change
- Film de polyimide Kapton et adhésif double-face 3M
Polyimide Kapton + 3M bi-adhesive
- Gaine flexible silicone transparent opacité < 1%, anti-UV, antifeu
Extruded silicone flexible high transparency, anti-UV, flame-proof

- 24 VDC
24 VDC
- 10°C ~ 40°C
-10°C ~ 40°C
- Convection naturelle
Natural convection



Références IP20 <i>IP20 References</i>	Références IP65 <i>IP65 References</i>	Couleur <i>Color</i>	Flux lumineux <i>Luminous flux</i>	Nb de LED <i>LED Qty</i>	Puissance <i>Consumption</i>	Longueur max. <i>Max. Length</i>	(L) Unité de coupe <i>(L) Cutting unit</i>
LF2835HE.112.7-27K	LF2835HE.112E.7-27K	 2700 K	1260 lm/m	112 LED/m	6,7 W/m	10 m	7.143 cm
LF2835HE.112.7-30K	LF2835HE.112E.7-30K	 3000 K	1320 lm/m				
LF2835HE.112.7-40K	LF2835HE.112E.7-40K	 4000 K	1420 lm/m				
LF2835HE.112.7-55K	LF2835HE.112E.7-55K	 5500 K	1450 lm/m				
LF2835HE.112.10-27K	LF2835HE.112E.10-27K	 2700 K	1820 lm/m		10 W/m		
LF2835HE.112.10-30K	LF2835HE.112E.10-30K	 3000 K	1900 lm/m				
LF2835HE.112.10-40K	LF2835HE.112E.10-40K	 4000 K	2060 lm/m				
LF2835HE.112.10-55K	LF2835HE.112E.10-55K	 5500 K	2100 lm/m				
LF2835HE.112.14-27K	LF2835HE.112E.14-27K	 2700 K	2290 lm/m		13,5 W/m		
LF2835HE.112.14-30K	LF2835HE.112E.14-30K	 3000 K	2410 lm/m				
LF2835HE.112.14-40K	LF2835HE.112E.14-40K	 4000 K	2590 lm/m				
LF2835HE.112.14-55K	LF2835HE.112E.14-55K	 5500 K	2650 lm/m				
LF2835HE.112.17-27K	LF2835HE.112E.17-27K	 2700 K	2720 lm/m		17 W/m		
LF2835HE.112.17-30K	LF2835HE.112E.17-30K	 3000 K	2870 lm/m				
LF2835HE.112.17-40K	LF2835HE.112E.17-40K	 4000 K	3080 lm/m				
LF2835HE.112.17-55K	LF2835HE.112E.17-55K	 5500 K	3150 lm/m				

OPTIONS OPTIONS

Coupe, montage sur mesure : nous consulter

Assembly, custom size : consult us

IRC 90+, IRC 95+ sur demande

CRI90+, CRI95+ on request

IP67 sur demande

IP67 on request

Gestion DALI, DMX, 0-10V, KNX, Radiofréquence, Phase, Push-dim

DALI, DMX, 0-10V, KNX, Radio Frequency, Triac, Push-dim control