


led3

LED3*JOY 36



Fixation magnétique
Magnetic fixing

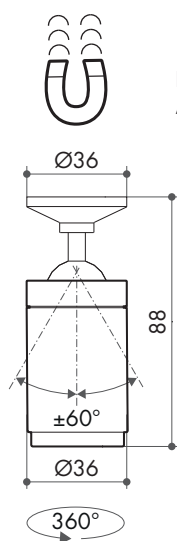

RÉFÉRENCES REFERENCES	CC	COULEUR COLOR	OP	OPTIQUE BEAM ANGLE	FLUX (4000K) LUMENS (4000K)	PUISSANCE CONSUMPTION	ALIMENTATION INPUT CURRENT	
LJY36.2-CC-OP			11 =  11° 18 =  18° 28 =  28° 40 =  40° 10X44 =  10x44°		140 lm	2 W	50 0 mA	
LJY36.4-CC-OP		30K =  3000 K 40K =  4000 K		8 =  8° 18 =  18° 30 =  30° 38 =  38° 61 =  61° 12X44 =  12x44°		280 lm	4 W	1000 mA

LED SMD Osram - IRC 90+ - 2 ellipses de MACADAM
LED SMD Osram - CRI90+ - 2 SDCM

50 000 heures - L80 B10 à Ta = 25°C
50 000 hours - L80 B10 at Ta = 25°C

Aluminium anodisé
Anodized aluminium

Convertisseur déporté inclus 220-240 VAC
Remote driver included 220-240 VAC

-20°C / +50°C
-20°C / +50°C

FINITIONS FINISH

Noir Black Argent Silver

Finition sur demande à partir de 100 pièces
Special finish on request from 100pcs

OPTIONS OPTIONS

Gestion DALI, DMX, 0-10V, KNX, Radiofréquence, Triac, Push Dim
DALI, DMX, 0-10V, KNX, Radio Frequency, Triac, Push Dim control

