




led3

## LED3\*LINE STEP 28

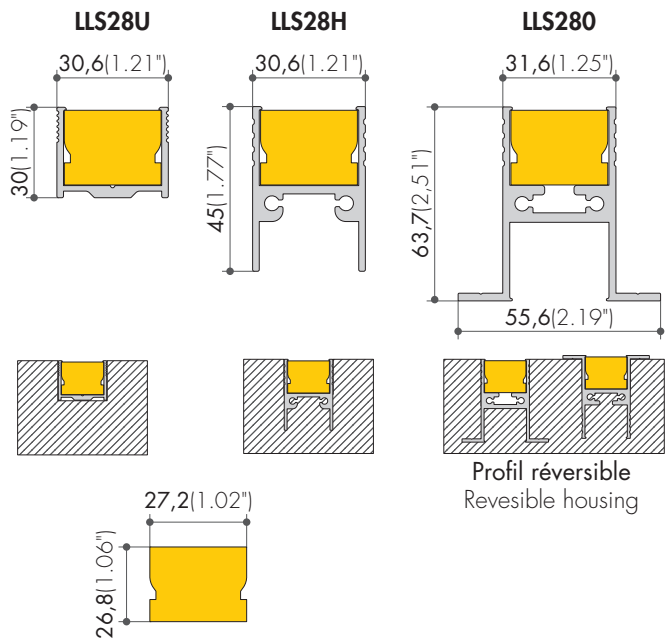

RÉFÉRENCES REFERENCES	CC	COULEUR COLOR	LG	PUISSANCE CONSUMPTION	FLUX LUMENS	ALIMENTATION POWER
LLS28U.10-CC-LG	27K =  2700 K		de 20 à 200 cm Between 0.65" and 6.56"	20 W/m 6.1W/feet	1180 lm/m 359.7 lm/feet	24 VDC
LLS28H.10-CC-LG	30K =  3000 K					
	40K =  4000 K					
LLS280.10-CC-LG	55K =  5500 K					
	A =					
	R =					
		G =				
		B =				

LED SMD - IRC 85 - 3 ellipses de MACADAM  
SMD LED - CRI85 - 3 SDCM

50 000 heures - L70 B10 à Ta = 25°C  
50 000 hours - L70 B10 at Ta = 25°C

Aluminium et PMMA extrudé  
Aluminium and PMMA extrusion

20 cm de câble  
20cm cable included

-20°C ~ +50°C  
-20°C ~ +50°C

## OPTIONS OPTIONS

Longueur de câble sur demande  
Cable length on request

IRC 90+ sur demande  
CRI90+ on request

IRC 90+ sur demande  
CRI90+ on request

Gestion DALI, DMX, 0-10V, KNX, Radiofréquence, Triac, Push Dim  
DALI, DMX, 0-10V, KNX, Radio Frequency, Triac, Push Dim control

